

T330 Series II HydroSeeder

The FINN T280/T330/T400 HydroSeeders are the largest, most robust members of the HydroSeeder family designed to meet the needs of large-scale jobsites and demanding seeding applications. These units have the power and output capacity to handle large mine reclamation, highways, and commercial sites with new conveniences, greater versatility and increased operator efficiencies.

**Performance & Productivity.** The T280/T330/T400 features a large centrifugal slurry pump, coupled with a Tier II turbo charged diesel engine to provide potent pump output, intense pressure and unmatched slurry discharge distances. The units are also equipped with an independently controlled pump/agitator operation; twin mechanical paddle agitation; liquid recirculation; and a hefty hydraulic system.

In addition to these performance-enhancing features, all units are equipped with the time-tested and field proven "clump" technology. This "clump" (clutch/pump) technology uses a unique single shaft design to maximize mechanical efficiency, making it the most efficient pump available.

*Model shown may include optional equipment.*


**Ergonomics & Controls.** The FINN T280/T330/T400 HydroSeeders are also designed for operator conveniences. The discharge boom was relocated to increase comfort and rear sweeping pattern; the engine control panel is integrated into the discharge boom tower putting all engine controls at the operator's fingertips; a standard ground level control station with engine start/stop, throttle, and pump control makes hose work trouble-free; a newly designed loading hatch with a larger opening and a curbside hinged lid enables more efficient loading; and an operator platform and access ladder have been enhanced for improved accessibility.

As the world leader for over 70 years in the design and manufacture of innovative, quality equipment for the green industry, FINN Corporation is committed to your complete satisfaction.


### SMARTER WAYS TO WORK

9281 LeSaint Drive • Fairfield, OH 45014-5457 • Phone (513) 874-2818 • Fax (513) 874-2914  
Toll Free (800) 543-7166 • Parts (800) 229-8707 • E-mail: sales@finncorp.com  
Customer Service/Warranty (888) 382-1966


T400 HYDROSEEDER®

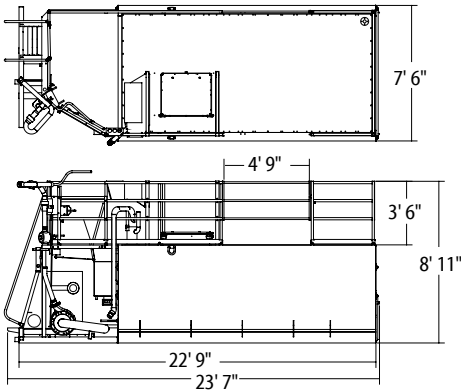

T330 HYDROSEEDER®

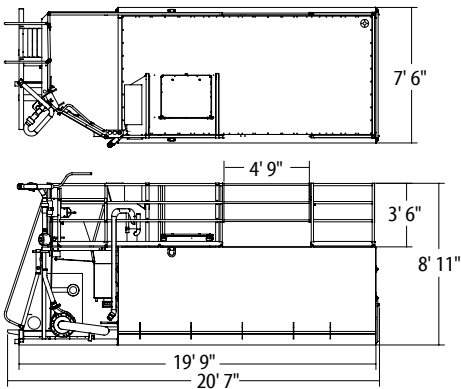

T280 HYDROSEEDER®

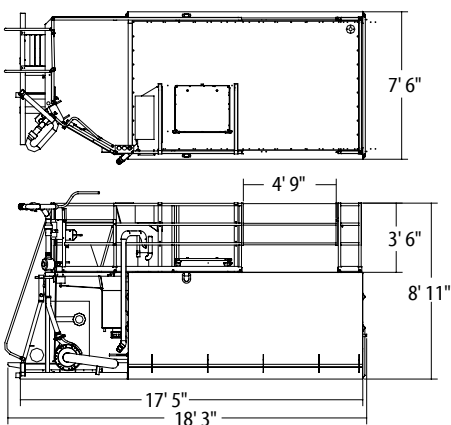

### FINN MODEL T280/T330/T400 TECHNICAL SPECIFICATIONS

POWER .....	John Deere 4045T (4.5 L) Tier II compliant industrial water-cooled ,115 hp Turbo Diesel, with over-center clutch. Vibration isolated. Control panel with digital engine information display, throttle, pump on/off, horn	
ENGINE SAFETY SYSTEM .....	Engine ECU with self-diagnostics including low oil pressure, high temperature shutoff	
TANK SIZE .....	T400	3,975 gallon (15,047 liter) liquid capacity, 3,600 gallon (13,627 liter) working capacity
	T330	3,350 gallon (12,681 liter) liquid capacity, 3,000 gallon (11,356 liter) working capacity
	T280	2,750 gallon (10,410 liter) liquid capacity, 2,500 gallon (9,464 liter) working capacity
FUEL TANK CAPACITY .....	38 gallon (144 liter)	
PUMP .....	Centrifugal 5" x 2-1/2" (12.7 cm x 6.4 cm) 400 gpm @ 130 psi, 1" (2.5 cm) solid clearance	
PUMP DRIVE .....	In-line coupled to air-controlled over-center clutch, pump drive is independent of agitator operation	
AGITATION .....	Twin mechanical paddle agitators and liquid recirculation	
AGITATOR DRIVE .....	Reversible, variable speed hydraulic motor drive (0-130 rpm)	
DISCHARGE DISTANCE .....	Up to 230 ft. (70 m) from discharge tower	
MATERIAL CAPACITY .....	T400	12,400 lbs. (5,625 kg) granular solids, 1,800 lbs. (816 kg) fiber mulch
	T330	10,000 lbs. (4,536 kg) granular solids, 1,500 lbs. (680 kg) fiber mulch
	T280	8,000 lbs. (3,630 kg) granular solids, 1,250 lbs. (570 kg) fiber mulch
NOZZLES .....	(2) narrow fan, (2) wide fan, (2) long distance	
EMPTY WEIGHT .....	T400	10,436 lbs. (4,734 kg)
	T330	9,600 lbs. (4,354 kg)
	T280	8,950 lbs. (4,060 kg)
WORKING WEIGHT* .....	T400	44,000 lbs. (19,958 kg)
	T330	42,000 lbs. (19,051 kg)
	T280	35,600 lbs. (16,148 kg)
LOADING HATCH .....	Large sealed hatch with 24-1/2" x 29-1/2" opening and a pivoting stainless steel bag cutter and safety grate	