



# Bark Blower

Model BB302



BB302 Bark Blower

The FINN BB302 Bark Blower applies landscape mulch and other bulk materials with unprecedented efficiency, and eliminates the need for labor-intensive hand application. The 1.5 cubic yard hopper is perfect for smaller jobs and hard to reach areas.

### Versatile.

BB302 applications include commercial and residential mulch beds, slopes, public gardens, playgrounds, amusement parks, mall interiorscapes, and other applications that require precise placement of bulk materials. Apply standard bark mulch, wood chips, compost, and other similar bulk materials. Mulch can be applied on virtually any terrain, even in wet conditions.

### Labor Saver.

The BB302 Bark Blower significantly reduces worker fatigue. Two operators can easily apply more than 10 cubic yards of bark mulch per hour, compared to approximately 1 cubic yard per man-hour via hand methods. The BB302 helps reduce material cost from 20% to 40% by breaking up material clumps and by producing an even mulch spreading pattern, with fine particles on top.

*Model shown may include optional equipment.*

### Capably Equipped.

The BB302 propels bark mulch utilizing a specially engineered air lock and blower system through various lengths of durable 4" flexible hose for application up to 200' away. Remote controls allow the operator to control power and material flow from any operating distance. Units are equipped with 150' of hose, with additional lengths available in 50' or 100' sections. A rear mounted hose reel is standard.

As the world leader for over 70 years in the design and manufacture of innovative, quality equipment for the erosion control industry, FINN Corporation is committed to your complete satisfaction.





BB302 Bark Blower



# Bark Blower

## Model BB302 with Tier 4Final Diesel Engine

### BB302 BARK BLOWER

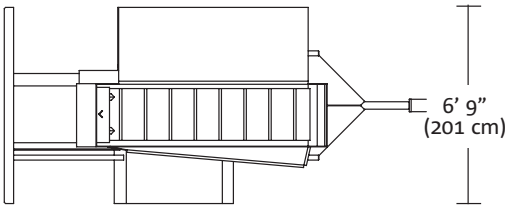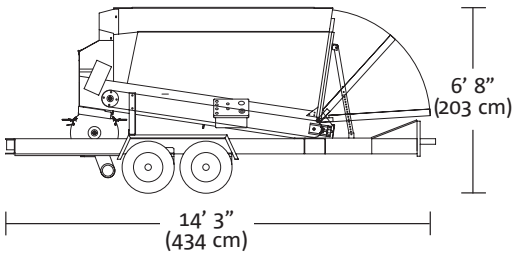

### FINN MODEL BB302 TECHNICAL SPECIFICATIONS

POWER..... Yanmar 3TNV88C-DYEM, 35.1hp (26.2kw), 3 cylinder water cooled diesel engine. Tier 4Final. 1.642L

ENGINE SAFETY SYSTEM ..... Low oil pressure, high water temperature shutoff

CAPACITY ..... 1.5 cubic yd (1.2m<sup>3</sup>)

FUEL TANK CAPACITY ..... 11.8 gallon (44.7 liter)

BLOWER ..... 500 cfm @ 10 psi (14 cmm @ 69 kPa)

EMPTY WEIGHT\* ..... 4,650 lbs. (2,111 kg)

WORKING WEIGHT\* ..... 5,850 lbs. (2,656 kg)

TRUCK REQUIREMENT MINIMUM ..... 6,000 lbs. (2,730 kg)

\*Weights are preliminary. Working weights are approximate and do not include options or stored materials. Based on material at 800 lbs/cu. yd.

FINN Corporation has a policy of continuous product improvement, and reserves the right to change design and specifications without notice.

FINN Design® Logo is a trademark of FINN Corporation.



9281 LeSaint Drive • Fairfield, OH 45014-5457

Toll Free 800.543.7166 / 513.874.2818

FINNcorp.com