



CENTURY™ SERIES

35 TON CAPACITY



SOME OPTIONAL EQUIPMENT MAY BE SHOWN.

ROGERS® presents our 35-ton capacity detachable gooseneck Century Series trailer - Model CY35PL. Each Rogers CY35 trailer is manufactured with the superior quality standards that provide the longest life cycle in the industry. Rogers brings simple, economical, trouble-free operation to your hauling requirements.

STANDARD FEATURES



■ Lowered crossmembers in the rear frame provide extra space for excavator booms. "Lumber to the tires" yields an extra foot of deck space. Light-weight trunnion beams are used to tie-down loads. Spring loaded parking brakes provide improved loading and unloading safety.



■ Unitized frame with mainbeams fabricated of 100,000 PSI steel. Heavy-duty, full-width cross members on 24" centers for longer deck life. Full 1 3/4" air-dried oak decking installed with carriage bolts and cupped washers for easy replacement. Optional heavy-duty swinging, removable cast side brackets widen the deck to 10'- 6". Tested and certified D-rings exceed today's load securement regulations.




■ Exclusive Croucher® front with tapered beams hugs the ground for optimal loading stability and approach angle. Concealed, flush deck hooks won't damage low ground clearance equipment. Optional front loading ramps are available in either self-leveling style, or Rogers exclusive sliding ramps - adjustable from approximately 32" in-to-in to 114" out-to-out. Powerful, low operating pressure No Foot® self-lifting gooseneck saves time and effort by lifting the rated load on any terrain and permits quick deck height adjustment from 49" to 53" to clear obstructions. Equipment rides over the Scraperneck gooseneck to maximize deck length.



...since 1905

THE ULTIMATE IN TRAILERS

ROGERS BROTHERS CORPORATION
100 Orchard Street Albion, Pennsylvania 16401
Phone (814) 756-4121 Fax (814) 756-4830
Toll Free (800) 441-9880
www.rogerstrailers.com

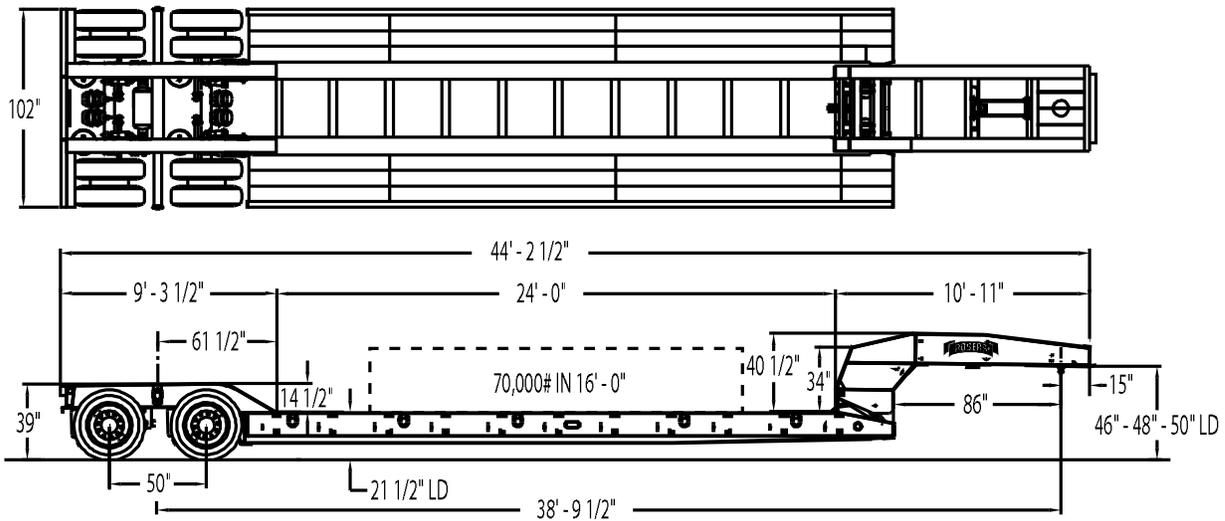

SPECIFICATIONS	Maximum Structural Capacity	Suspension	Axles	Tires	Wheels & Rims	Air Brakes	Gooseneck Hydraulics	Empty Weight	Gross Vehicle Weight Rating	Gross Axle Weight Rating
	35 tons in 16'-0" of the deck	Heavy-duty air ride with mechanical height control Capacity: 50,000 lb	5" round Capacity: 25,000 lb @ 60 mph	255/70R22.5 (H) 16 PR low-profile tubeless radial Capacity: 20,280 lb	22.5" x 8.25" steel disc wheels on hub-piloted hub & drum oil bath bearings, 16 1/2" x 7" drum	Rising "S" cam style 4S/2M ABS with spring parking brakes	Max. Pressure: 2,000 psi Max. Flow: 20 gpm	14,400 lb	84,400 lb	20,280 lb @ 60 mph 25,000 lb @ 20 mph

STANDARD FEATURES

- 24' x 102" platform deck with 22" loaded height.
- Unitized frame with full-width cross members on 24" centers.
- Hydraulic gooseneck jack paddle and shoe.
- "Security Link" keeps gooseneck in position for easy reconnection to tractor.
- Side channel reinforcing the first 6'-0" of the deck.
- Twelve (12) D-rings.
- Full 1 3/4" air dried oak decking.
- 50,000# air suspension with mechanical height control.
- ABS: 4S/2M premium system.
- US DOT-Approved 12 volt, rubber-mounted, sealed beam lights with weather resistant modular wiring system and SAE J560 7-wire socket.
- Corrosion resistant undercoating for trailer subframe.
- Moisture-cured urethane primer.
- Standard finish - RBC Red.

OPTIONAL EQUIPMENT

- Gooseneck fenders.
- 13 HP gas engine power unit.
- Self-adjusting front folding ramps.
- Sliding front folding ramps.
- Center boards (installed or loose)
- Twenty-four (24) swinging side brackets.
- 3rd axle air lift.
- 1/4" smooth plate reinforced wheel covers with grouser bars.
- Aluminum disc wheels.
- 275/70R 22.5 (H) 16 PR low profile tires.
- L.E.D. light package.
- US DOT-approved safety light system with 12v deep cycle battery.
- Back-up warning alarm.

The name you know, experience you can trust and the performance to back it up.



...since 1905

ROGERS BROTHERS CORPORATION

100 Orchard Street
Albion, Pennsylvania, 16401
(800) 441-9880
(814) 756-4121
FAX (814) 756-4830
www.rogerstrailers.com