


FELLING TRAILERS

DROP-DECK TRAILERS

E Series - Pan Series - L Series - I Series

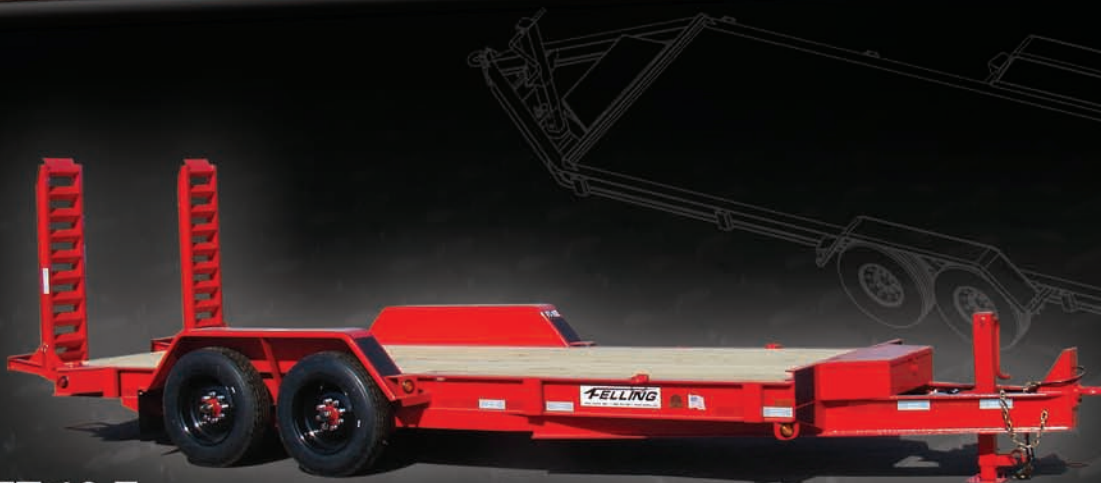

FT-16 E

Shown with optional
Toolbox and Viper Red paint.



FT-20 I



DD-101

The **FELLING** *Style*
Quality ~ Craftsmanship ~ Pride



Since 1974

E SERIES

Definition - Drop-Deck trailer constructed of a heavy duty structural channel (H-beam on FT-16 E and up) frame with a stacked hitch design and Jr. I-beam crossmembers.

- Load Capacities ranging from 6,000 lbs. to 24,000 lbs.
- Loaded deck heights, 20" to 24.5".
- Deck width 102" OD, 82" ID (84" ID with open wheel wells.)
- Ease in loading/unloading with Open Deck Design.
- Tie Downs: (8) D-rings.
- LED lights, with sealed wiring harness.
- Offered in Wide Deck Option (WD) deck width extends to be flush with outer edge of fenders.
- Boring & Paving Packages Available.



FT-16 E
shown with optional toolbox, stake pockets and Viper Red paint.

PAN SERIES

Definition - Drop-Deck trailer constructed of a structural channel tongue, fabricated steel pan sides and Jr. I-beam crossmembers.

- Load Capacities ranging from 7,000 lbs. to 14,000 lbs.
- Fabricated steel pan sides, 8" to 10" (12" sides on 18' deck lengths and up.)
- Loaded deck heights; 14" - 16".
- Deck width 79".
- Tie downs: (2) corner tie downs, (6) D-rings.
- LED lights, with sealed wiring harness.



FT-12 P
shown with optional toolbox.

FELLING
DECKING
OPTIONS
DROP-DECK SERIES


WOOD
(Pressure Treated, White Oak & Angelim)



FLOOR PLATE



EXPANDED METAL

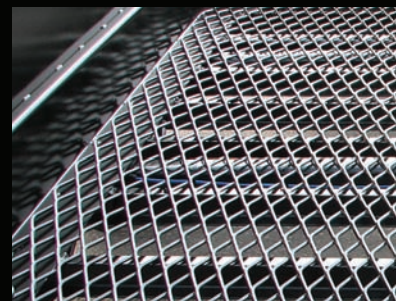

I SERIES

Definition - Drop-Deck trailer constructed of a Cold Formed I-beam main frame and Jr. I-beam crossmembers.

- Load Capacities ranging from 7,480 lbs. to 20,000 lbs.
- Loaded deck heights, 20" to 24.5".
- (2) Cold Formed beams create a clean and strong single frame design.

- Deck width 102" OD, 82" ID.
- Tie downs: (8) D-rings.
- LED lights, with sealed wiring harness.
- Boring Packages Available.



• WIDE DECK WIDTH
• STREAMLINED DESIGN



FT-14 I

shown with optional toolbox.

L SERIES

Definition - Drop-Deck trailer constructed of an angle iron frame and Jr. I-beam crossmembers.

- Load Capacities ranging from 7,000 lbs. to 14,000 lbs.
- Loaded deck heights, 19" to 20".
- Deck width 102" OD, 81" ID on FT-10 L thru FT-14 L.

- Tie Downs: (2) Corner Tie Downs & (6) D-rings.
- LED lights, with sealed wiring harness.



• CLASSIC DESIGN
• ALL-PURPOSE TRAILER



FT-14 L

shown with optional toolbox, stake pockets and Viper Red paint.

RUMBER

SMOOTH STEEL

**SMOOTH STEEL
(WITH ANTI-SKID)**

**DOVETAIL
(LENGTH & MATERIAL VARY)**



ALL ALUMINUM CONSTRUCTION & HOT DIP GALVANIZING

AVAILABLE ON ALL MODELS.

Drop - Deck Standard Specifications		Deck Length	Deck Width	Trailer Weight (approx.)	Deck Height (loaded)	Frame	Cross- members	Wheels & Tires	Ramps	Jack	GVWR (lbs.)
FT-7	E - Series	14' (4.26 m.)	102" OD, 82" ID	1,800 lbs./816 kg.	20" (50 cm.)	5" Struc. Chan.	3" Jr.I	ST225/75R15 D 5 Bolt	5' Spring Assist	2K	8,000
	L - Series	14' (4.26 m.)	102" OD, 81" ID	1,800 lbs./816 kg.	20" (50 cm.)	5"x3"x3/8" angle iron	3" Jr. I	ST225/75R15 D 5 Bolt	5' Spring Assist	2K	8,000
	Pan Series	14' (4.26 m.)	96" OD, 74" ID	1,800 lbs./816 kg.	14" (35.5 cm.)	8" pan sides	3" Jr. I	ST225/75R15 D 5 Bolt	5' Spring Assist	2K	8,000
FT-10	E - Series	16' (4.87 m.)	102" OD, 82" ID	2,500 lbs./1,134 kg.	21" (53.3 cm.)	6" Struc. Chan.	3" Jr. I	ST225/75R15 D 6 Bolt	5' Spring Assist	7K	9,980
	I - Series	16' (4.87 m.)	102" OD, 82" ID	2,500 lbs./1,134 kg.	21" (53.3 cm.)	6" I-Beam	3" Jr. I	ST225/75R15 D 6 Bolt	5' Spring Assist	7K	9,980
	L - Series	16' (4.87 m.)	102" OD, 81" ID	2,500 lbs./1,134 kg.	20" (50 cm.)	6"x4"x3/8" angle iron	3" Jr. I	ST225/75R15 D 6 Bolt	5' Spring Assist	7K	9,980
	Pan Series	16' (4.87 m.)	102" OD, 79" ID	2,500 lbs./1,134 kg.	15" (38.1 cm.)	8" pan sides	3" Jr. I	ST225/75R15 D 6 Bolt	5' Spring Assist	7K	9,980
FT-12	E - Series	16' (4.87 m.)	102" OD, 82" ID	2,700 lbs./1,224 kg.	22" (55.8 cm.)	7" Struc. Chan.	3" Jr. I	ST235/80R16 E 8 Bolt	5' Spring Assist	12K	14,700
	I - Series	16' (4.87 m.)	102" OD, 82" ID	2,700 lbs./1,224 kg.	22" (55.8 cm.)	6" I-Beam	3" Jr. I	ST235/80R16 E 8 Bolt	5' Spring Assist	12K	14,700
	L - Series	16' (4.87 m.)	102" OD, 81" ID	2,700 lbs./1,224 kg.	22" (55.8 cm.)	6"x4"x3/8" angle iron	3" Jr. I	ST235/80R16 E 8 Bolt	5' Spring Assist	12K	14,700
	Pan Series	16' (4.87 m.)	102" OD, 79" ID	2,700 lbs./1,224 kg.	16" (40.6 cm.)	10" pan sides	3" Jr. I	ST235/80R16 E 8 Bolt	5' Spring Assist	12K	14,700
FT-14	E - Series	16' (4.87 m.)	102" OD, 82" ID	3,200 lbs./1,451 kg.	22" (55.8 cm.)	7" Struc. Chan.	4" & 3" Jr. I	ST235/80R16 E 8 Bolt	6' Spring Assist	12K	17,200
	I - Series	16' (4.87 m.)	102" OD, 82" ID	3,200 lbs./1,451 kg.	22" (55.8 cm.)	6" I-Beam	3" Jr. I	ST235/80R16 E 8 Bolt	6' Spring Assist	12K	17,200
	L - Series	16' (4.87 m.)	102" OD, 80" ID	3,200 lbs./1,451 kg.	23" (58.4 cm.)	7"x4"x1/2" angle iron	3" Jr. I	ST235/80R16 E 8 Bolt	6' Spring Assist	12K	17,200
	Pan Series	16' (4.87 m.)	102" OD, 79" ID	3,200 lbs./1,451 kg.	16" (40.6 cm.)	10" pan sides	4" & 3" Jr. I	ST235/80R16 E 8 Bolt	6' Spring Assist	12K	17,200
FT-15	E - Series	16' (4.87 m.)	102" OD, 82" ID	3,500 lbs./1,587 kg.	22" (55.8 cm.)	8" Struc. Chan.	4" & 3" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	17,900
	I - Series	16' (4.87 m.)	102" OD, 83.5" ID	3,500 lbs./1,587 kg.	22" (55.8 cm.)	10" I-Beam	3" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	17,900
FT-16	E - Series	16' (4.87 m.)	102" OD, 81" ID	3,600 lbs./1,632 kg.	24" (61 cm.)	8" H-Beam	4" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	19,600
	I - Series	16' (4.87 m.)	102" OD, 82" ID	3,600 lbs./1,632 kg.	24" (61 cm.)	10" I-Beam	4" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	19,600
	Pan Series	16' (4.87 m.)	102" OD, 79" ID	3,600 lbs./1,632 kg.	16" (40.6 cm.)	12" pan sides	4" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	19,600
FT-20	E - Series	20' (6.09 m.)	102" OD, 82" ID	4,000 lbs./1,814 kg.	24.5" (62.2 cm.)*	8" H-Beam	4" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	24,000
	I - Series	20' (6.09 m.)	102" OD, 82" ID	4,000 lbs./1,814 kg.	24.5" (62.2 cm.)*	10" I-Beam	4" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	24,000
FT-24	I - Series	20' (6.09 m.)	102" OD, 82" ID	4,200 lbs./1,905 kg.	28" (71 cm.)	8" Reinforced I-Beam	4" Jr. I	235/75R17.5 H 8 Bolt	6' Spring Assist	12K	25,900
FT-24-3	E - Series	20' (6.09 m.)	102" OD, 81" ID	4,000 lbs./1,814 kg.	22" (55.8 cm.)	8" H-Beam	4" Jr. I	215/75R17.5 H 8 Bolt	6' Spring Assist	12K	28,000

*With optional drop torsion axle.

CUSTOMIZATION: *Definition* - To modify or build according to individual or personal specifications or preference.

Felling Trailers believes that *"It's All In The Details"* when it comes to building a trailer. We build trailers to accommodate *your* equipment and to suit *your* needs, right down to the last detail. The options and features are limitless...contact Felling Trailers to design the trailer that is right for you.

Your **FELLING** TRAILER Dealer:

FELLING
TRAILERS

Manufactured & Distributed by: **Felling Trailers, Inc.**

1525 Main St. S • Sauk Centre, MN 56378

(320) 352-5239 • (320) 352-5230 FAX

Check out our Web Site at: <http://www.felling.com>

E-mail us at: trailers@felling.com

Call **1-800-245-2809** for your nearest dealer